Enduraliner™ Measuring Form

For Custom In-Ground Pool Liners

Quote# _____ Date _____

Dealer Name			Pool Owner Name _			
Dealer Contact Name			Address			
Address			City		St Z	ip
City	St Zip)	Phone		Fax	
Phone	Fax		E-Mail Address			
Web Site Address			Your Signature Your signature indicates that your signature indicates that your older is correct. Your new (Orders cannot be processed)	you have verified your me vinyl liner will be made to	asurements and that the in these specifications once	ıformation you have you place your order.
1 LIN	ER PATTERN		3	LINE	R TYPE	
Pattern Name:			☐ Beaded		Pool De	eck
Mil (check one): ☐ 20mil	☐ 28mil		☐ Low Hung Be	aded		
Check your corner type below Cut Corner	<u></u>	where required:	OverlapHow many in do you need	ches of liner for the overlap? _		Beaded Low Hung Beaded
□ 90 Degree Corner	No measureme square corners.			f your liner is a St	Hung Beaded," p andard or Reverse	e bead:
Radius/Rounded Corner	2	2:	Pool Wall —	the bottom	Pool Wall →	on the top Liner
4			R TYPE			
Check one & fill in measure A. Standard Hopper	ments on the form to the	he right: □ B. Wedge Ho	ppper		ı all measurements ur hopper type:	that apply
	C Pool End	*		ol End C	ft .	ir
J I sol state that	View	J		liew C ₁	ft _	ir
-G-) - 	√ G► −	- E	- I- -H- D	ft	ir
C. Constant Slope Hop	per	D. Safety Led	dge Hopper	E	ft	ir
Pool Side View	C Pool End	Pool Side Viev			ft	lr
<u> </u>	View			iew G _	ft _	ir
 t	→ ← - →	G < F > 	D I _{H1} I⊓-	▲I►I ^{□I} H ₁	ft _	ir
Are you measuring the Be sure you are NOT measuring		easurements. We only i	use H ₁	ft _	ir	
measurements parallel to the			-		ft _	ir
15 ft. 6 in	<u>. </u>	<u> </u>	. 6 in.	J	ft	ir
RIGHT		WR	RONG			


6 ft. 6 in.

4 ft. 6 in. 6 ft. 6 in. 4 ft. 6 in.

POOL SHAPE


Check one & fill In the measurements below:

NOTE: Diagonal measurements must be taken to imaginary squared off corners of your pool if you have radius or cutoff corners. (i.e. diagonal measurement Q & R on the rectangular pool)





Measure to imaginary point 1, NOT the edge of the pool

Dimensions: Please transfer all of the measurements you have taken into the appropriate spaces below. NOTE: you may not use all the letters below, depending on your pool shape.

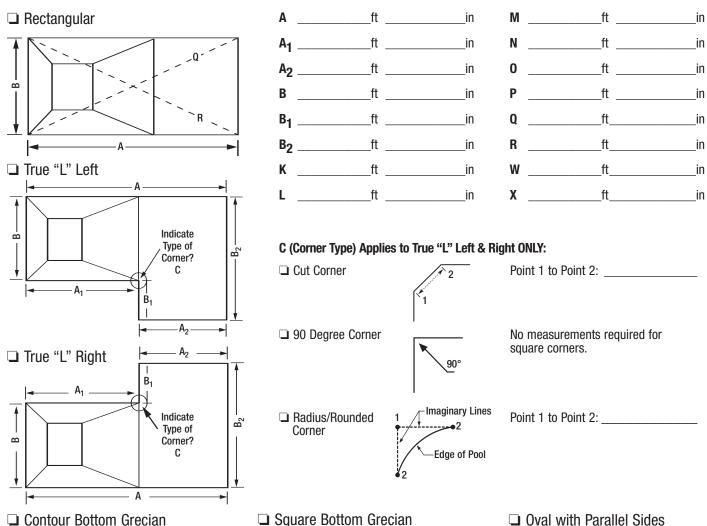

B Q Q A A P

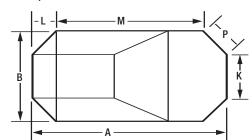



VINYL COVERED STEPS

Please check one:

- ☐ Fiberglass (No Further Measurements Needed)
- ☐ Vinyl Covered (Fill Out the Section on Pg. 3)
- No Steps

VINYL COVERED STEPS Cont.


What is the Step Position?

Top Step Corners

Square

□ Radius


Please circle the position that best describes the location of your step and provide measurements (Y) and (A).




n
n

□ Dia	agonal _	in
	А	
	В	
*	С	
**	D	
**	Е	
**	F	
***	G	
***	Н	
***	I	
***	J	

Rod Pockets	☐ Yes	☐ No	Step Setback Yes No
Size			If yes, see below
	(Diameter of F	Rod)	Setback width (K)
Nailer Flaps	☐ Yes	□ No	☐ Straight ☐ Angled (L)

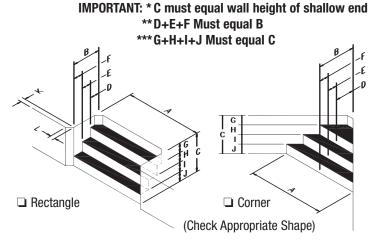



HELPFUL HINTS

⊢G

string

weight

under water

Measuring the pool bottom without entering the pool:

You will be able to make horizontal measurements of you pool bottom without entering the pool. Taking these measurements is easier than you may think, when you use this easy-to-make measuring tool.

You will need:

- 1. A long straight pole (telepole) "fishing pole"
- 2. String attached to one end of the pole
- 3. Some sort of weight tied to the other end of the string
- 4. A measuring tape

Follow the instructions below, using your fishing pole, to make these measurements.

Horizontal Bottom Measurements: Use your "fishing pole" to "fish" for a point on the bottom of the pool. With the pole to the ends of the pool and the string vertical (allow no

slack in the string), measure the distance from the edge of the pool (water's edge) to the end of the pole where string is attached. You should "fish" for points that will achieve the desired measurements based on the bottom contour of your pool (pictured on page 1).

For example, to take measurement (H), you would stand on one side of the pool, and "fish" for a corner of the Hopper. You would then measure the distance from the edge of the pool (water's edge) to the end of the pole where the string is attached.

Depth measurements: When taking the depth measurements (C) and (J), be sure to measure from the bottom of the pool floor to the bead receiver (for beaded liners) OR to the board where the liner is nailed or stapled (for overlap liners). Do not measure to the top of the pool if you have a bead receiver, your measurement will be incorrect.